



END TYPE A

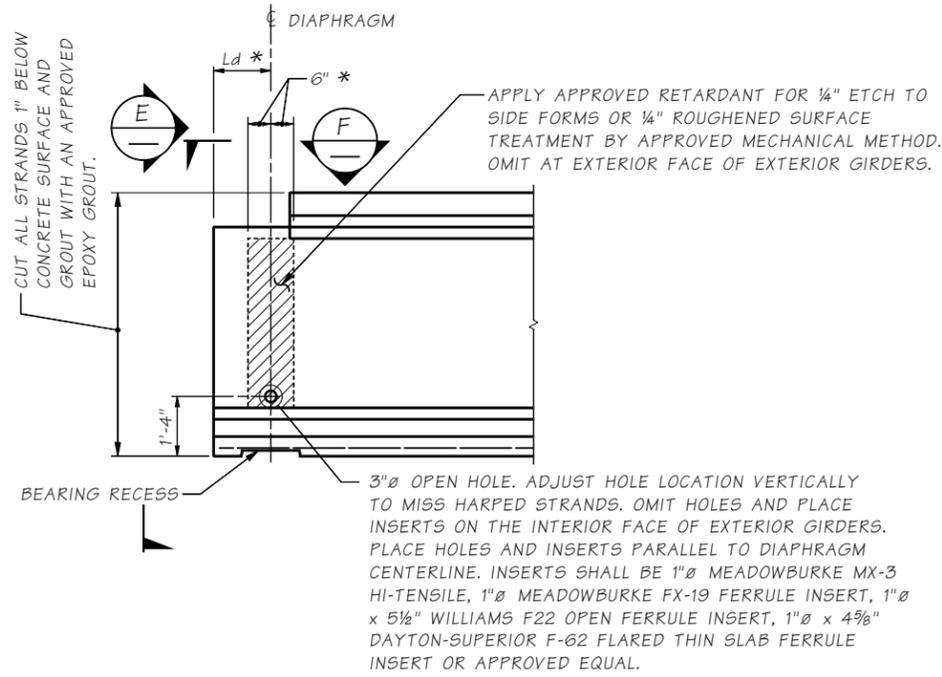


END TYPE B

* MEASURED NORMAL TO ϕ DIAPHRAGM


1¹/₁₆" ϕ MIN. STRAND CHUCK OR ASTM A108 2³/₄" ϕ x 1¹/₂" STRAND ANCHOR. ANCHOR STRAND WITH WEDGES BEFORE GIRDER ERECTION. VERIFY WEDGES ARE SEATED TIGHTLY IMMEDIATELY BEFORE PLACING DIAPHRAGM CONCRETE.

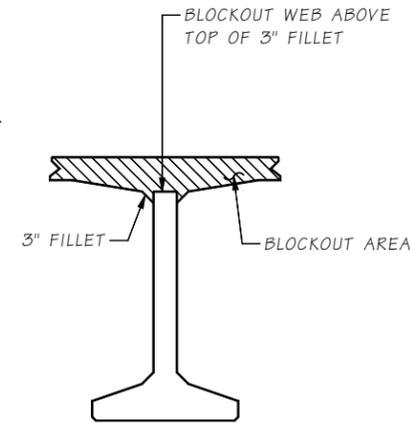


VIEW E

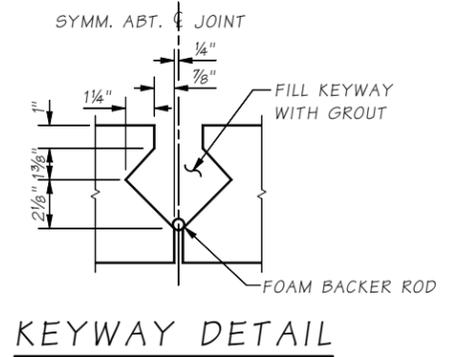


KEYWAY DETAIL

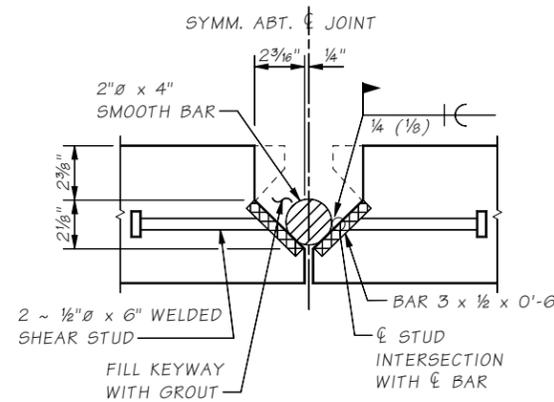

WELD TIE DETAIL

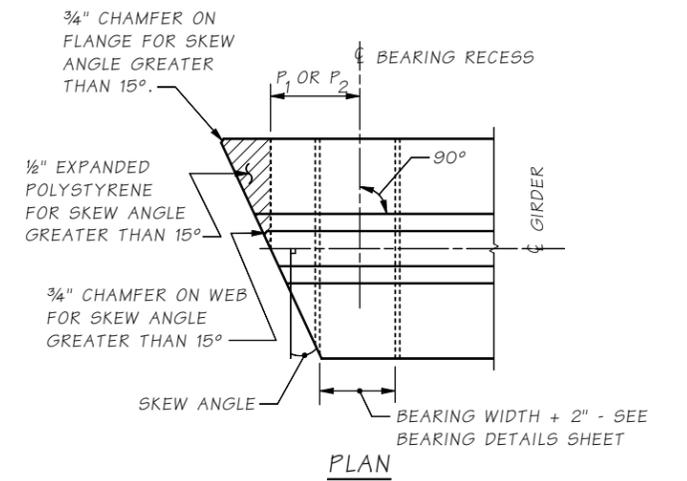


PLAN

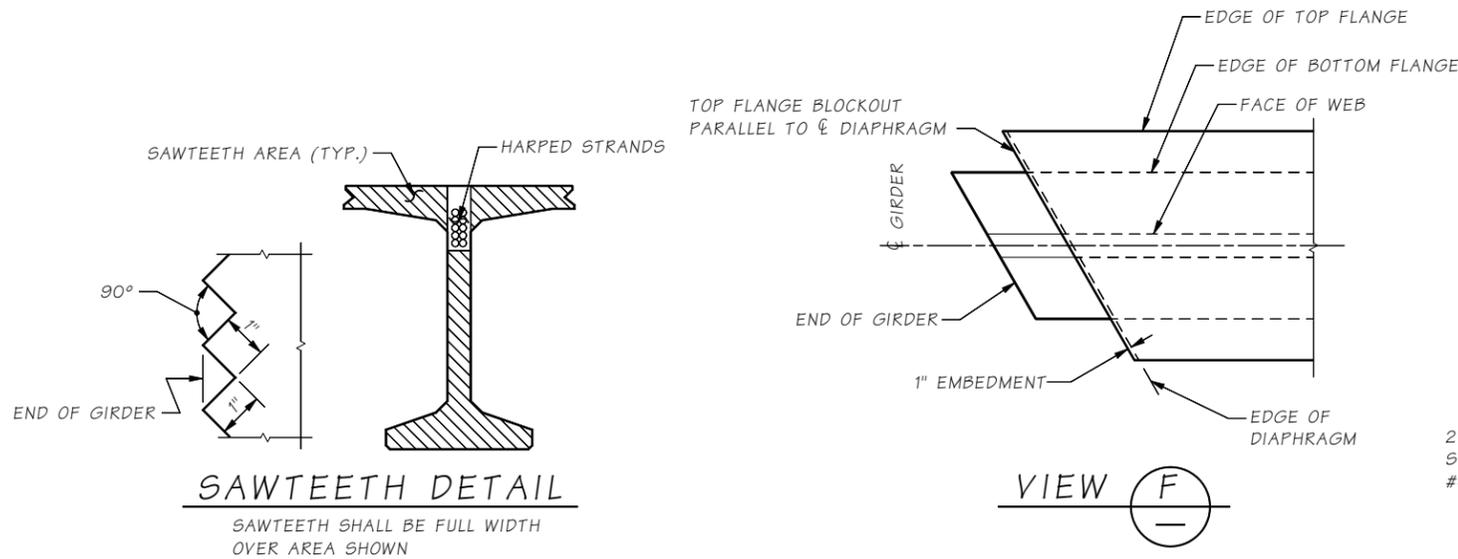


SAWTEETH DETAIL


SAWTEETH SHALL BE FULL WIDTH OVER AREA SHOWN

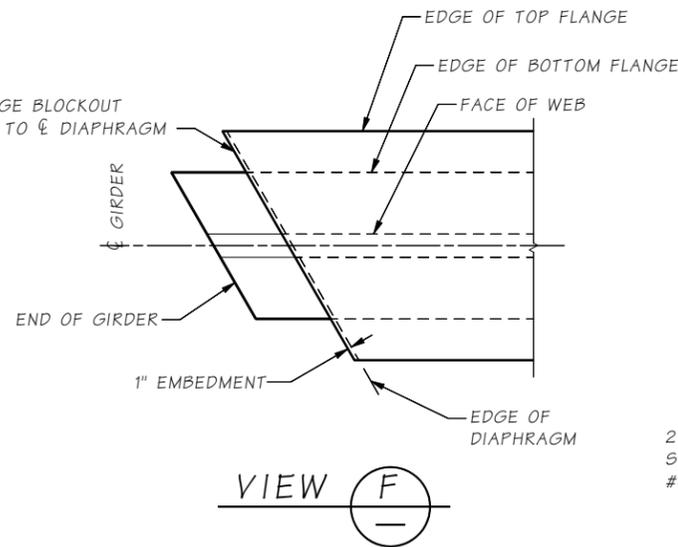

VIEW F

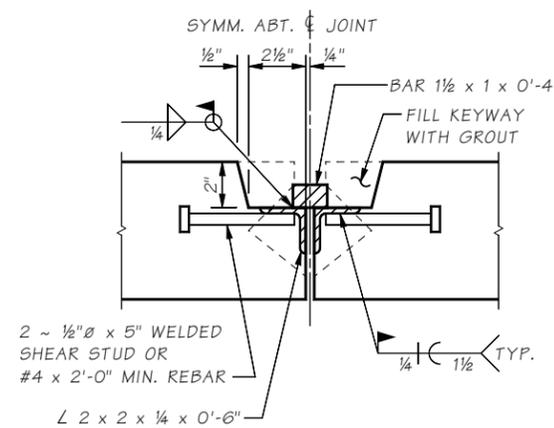

ALT. WELD TIE DETAIL

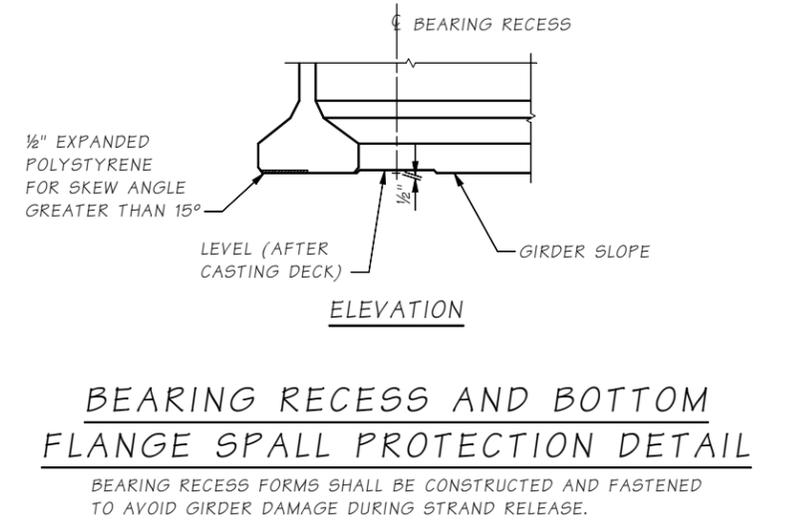

ELEVATION

BEARING RECESS AND BOTTOM FLANGE SPALL PROTECTION DETAIL

BEARING RECESS FORMS SHALL BE CONSTRUCTED AND FASTENED TO AVOID GIRDER DAMAGE DURING STRAND RELEASE.

Last revised on : 04/07/2016

SR FILE NO. SHEET

5.6-A6-3

Bridge Design Engr.		M:\STANDARDS\Girders\WFDG\WFDG GIRDER DETAILS 3 OF 4.MAN				REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
Supervisor		10	WASH							
Designed By		JOB NUMBER								
Checked By										
Detailed By										
Bridge Projects Engr.										
Prelim. Plan By										
Architect/Specialist	DATE	REVISION	BY	APPD						

BRIDGE AND STRUCTURES OFFICE



STANDARD PRESTRESSED CONCRETE GIRDERS

WF DECK GIRDER DETAILS 3 OF 4

BRIDGE SHEET NO. SHEET OF SHEETS